


EPX-AD-ZIF40.YD

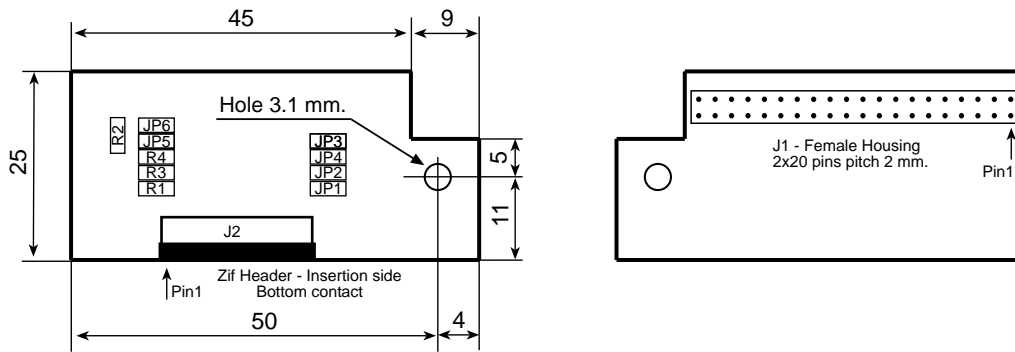

Adapter EPX-AD-ZIF40.YD		
J1 - Housing pitch 2mm. 2x20 Pins	Signal	J2 - ZIF Header SMT 0.5 mm. 40 Pos.
1	N.C.	
2	N.C.	
3	ENAB	35
4	N.C.	
5	N.C.	
6	CLK	3
7	Bus GND	
8	N.C.	
9	N.C.	
10	RE0	7
11	RE1	8
12	Bus GND	
13	RE2	9
14	RE3	11
15	RE4	12
16	RE5	13
17	Bus GND	
18	N.C.	
19	N.C.	
20	GE0	15
21	GE1	16
22	Bus GND	
23	GE2	17
24	GE3	19
25	GE4	20
26	GE5	21
27	Bus GND	
28	N.C.	
29	N.C.	
30	BE0	23
31	BE1	24
32	Bus GND	
33	BE2	25
34	BE3	27
35	BE4	28
36	BE5	29
37	Bus GND	
38	Bus VCC	
39	Bus VCC	
40	N.C.	
	Bus VCC	37, 38, 39, 40
	Bus GND	1, 2, 4, 5, 10, 14, 18, 22, 26, 30, 32, 34
	N.C.	31, 33, 36
Sel VCC with JP5 or GND with JP6	REV	6

Included FFC cable 40 pin Inv.(D Type) - lenght 200 mm - pitch 0.5 mm